

Catalog Information

2-WIRE (L)	3-WIRE (H)	WIDE 2-WIRE (J)	LAMP TYPE	MAX WATT	FINISHES
------------	------------	-----------------	-----------	----------	----------



LHT-1109	HHT-1109	JHT-1109	MR11	35W	BK, WT, GL/BK, GL/WT, BN/BK, BN/WT
----------	----------	----------	------	-----	------------------------------------

Finish Key: BK-Black, WT-White, GL/BK-Black with Gold Head, GL/WT-White with Gold Head, BN/BK-Black with Brushed Nickel Head, BN/WT-White with Brushed Nickel Head

Product Features

- Electronic transformer:** With auto reset and soft start. 120V to 12V.
- Dimmable:** With electronic dimmer or generally dimmable with standard incandescent dimmer.
- Aiming:** 90° degrees from vertical and 356° rotational.
- Compatible:** L, H, and J models in addition to fitting our own tracks are retrofittable to other manufacturers original tracks (consult factory for specific brand names).
- Special Application:** The J style head may be installed on any "J" style 2-circuit track with the addition of the J-CLIP.
- Lamping:** Re-lamps from the front, lamp retained by a tension ring.
- Socket:** Bi-pin ceramic with 18 gauge Teflon insulated wires, with fiberglass sleeves.

Options/Accessories

- Lens Options: Colored, Colored Dichroic, and Ultra Violet lenses.
- Fixtures available with 6", 12", 18", 24", 36", 48", 72", 96" extensions (factory assembled in BK, WT or BN). Specify fixture style and finish when ordering (i.e.: X18-HHT-1109-BK). Extensions are non-stock items, available only as a complete unit from the factory. Note: Extensions over 48" in length are shipped with two shorter rods and a threaded coupler, to be joined in the field.

Material

Die Cast Aluminum

Listings

UL, CUL Listed, New York City Approved.


W.A.C. reserves the right to change details that do not affect overall function and performance.



SPECIFICATION SHEET

LOW VOLTAGE TRACK HEADS

MODEL 1109

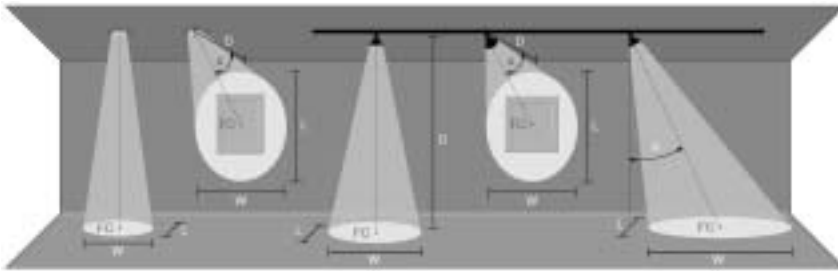

Key In Feet
D Distance To Fixture From Wall Or Floor
FC Initial Footcandle Level At Center Of Beam
L Beam Length(where candlepower drops to 50% of maximum)
W Beam Width(where candlepower drops to 50% of maximum)
CBCP Center Beam Candle Power

Lamp Beam Spread	CBCP	0°Aiming Angle				30°Aiming Angle				45°Aiming Angle				60°Aiming Angle			
		D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
20W MR11 NFL 30° FTD	600	2'	150	1.1'	1.1'	2'	97	1.5'	1.2'	2'	53	2.3'	1.5'	2'	19	5.5'	2.1'
		3'	67	1.6'	1.6'	3'	43	2.2'	1.9'	3'	24	3.5'	2.3'	3'	8	8.2'	3.2'
		4'	38	2.1'	2.1'	4'	24	2.9'	2.5'	4'	13	4.6'	3.0'	4'	5	10.9'	4.3'
		5'	24	2.7'	2.7'	5'	16	3.7'	3.1'	5'	8	5.8'	3.8'	5'	3	13.7'	5.4'
20W MR11* NSP 17° FTC	1760	3'	196	0.9'	0.9'	3'	127	1.2'	1.0'	3'	69	1.8'	1.3'	3'	24	3.8'	1.8'
		5'	70	1.5'	1.5'	5'	46	2.0'	1.7'	5'	25	3.1'	2.1'	5'	9	6.4'	3.0'
		7'	36	2.1'	2.1'	7'	23	2.8'	2.4'	7'	13	4.3'	3.0'	7'	4	9.0'	4.2'
		9'	22	2.7'	2.7'	9'	14	3.6'	3.1'	9'	8	5.5'	3.8'	9'	3	11.5'	5.4'
35W MR11* SP 20° FTF	3000	3'	333	1.1'	1.1'	3'	217	1.4'	1.2'	3'	118	2.2'	1.5'	3'	42	4.7'	2.1'
		5'	120	1.8'	1.8'	5'	78	2.4'	2.0'	5'	42	3.6'	2.5'	5'	15	7.8'	3.5'
		7'	61	2.5'	2.5'	7'	40	3.3'	2.9'	7'	22	5.1'	3.5'	7'	8	10.9'	4.9'
		9'	37	3.2'	3.2'	9'	24	4.3'	3.7'	9'	13	6.6'	4.5'	9'	5	14.0'	6.3'
35W MR11 NFL 30° FTH	1300	3'	144	1.6'	1.6'	3'	94	2.2'	1.9'	3'	51	3.5'	2.3'	3'	18	8.2'	3.2'
		5'	52	2.7'	2.7'	5'	34	3.7'	3.1'	5'	18	5.8'	3.8'	5'	7	13.7'	5.4'
		7'	27	3.8'	3.8'	7'	17	5.1'	4.3'	7'	9	8.1'	5.3'	7'	3	19.1'	7.5'
		9'	16	4.8'	4.8'	9'	10	6.6'	5.6'	9'	6	10.4'	6.8'	9'	2	24.6'	9.6'

*Not Sold by W.A.C Lighting